

PCK系列单转子可逆制砂机

PCK series single rotor reversible sand making machine




PCK系列单转子可逆制砂机，适合用于石灰石、青石、白云石、建筑垃圾等原料的细碎作业，颗粒级配与系数模数更适应商砼漏凝土搅拌站的要求，广泛应用于矿山、采石场、水泥厂等行业。

PCK series single-rotor reversible sand making machine is suitable for fine crushing of limestone, bluestone, dolomite, construction waste and other raw materials. The particle gradation and coefficient modulus are more suitable for the requirements of commercial concrete leakage concrete mixing plants, and are widely used in mines, quarries, cement plants and other industries.

性能特点


>> Performance Characteristics

- 1、梅花转子，菱形锤盘结构，破碎研磨制砂更有效；
- 2、转子外附高锰高铬保护套，寿命提高30%；
- 3、锤轴孔配有钨合金钢套，更耐磨损，耐冲击；
- 4、设备四周配备观察门，便于随时观察设备内部情况；

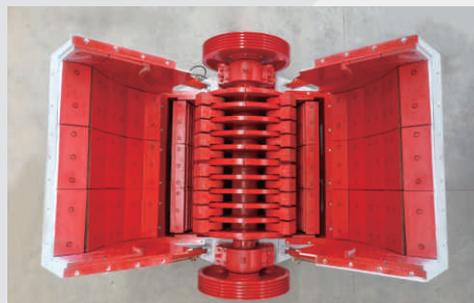

- 5、锤头可逆，大大提高锤头使用率；
- 6、结构简单实用，故障率低，相比双转子制砂机，同样产量功耗更低；
- 7、蓖条可根据需求定制，有圆孔蓖条和长条形蓖条可选；
- 8、蓖板和锤头之间的间隙可灵活调节，充分保证了设备的破碎效率；
- 9、成品粒型呈多棱体，级配连续，细度模数可调。

1. Plum blossom rotor, diamond-shaped hammer plate structure, more effective in crushing, grinding and sand making;
2. The rotor is equipped with a high manganese and high chromium protective cover, which increases the lifespan by 30%;
3. The hammer shaft hole is equipped with a tungsten alloy steel sleeve, which is more wear-resistant and impact-resistant;
4. Equipped with observation doors around the equipment, it is convenient to observe the internal conditions of the equipment at any time;
5. The hammer head is reversible, which greatly improves the utilization rate of the hammer head;
6. The structure is simple and practical, and the failure rate is low. Compared with the double-rotor sand making machine, the power consumption of the same output is lower;
7. The grating bars can be customized according to the needs, and there are round hole grating bars and long grating bars for option;
8. The gap between the grate plate and the hammer head can be adjusted flexibly, which fully guarantees the crushing efficiency of the equipment;
9. The grain shape of the finished product is polygonal, the gradation is continuous, and the fineness modulus is adjustable.

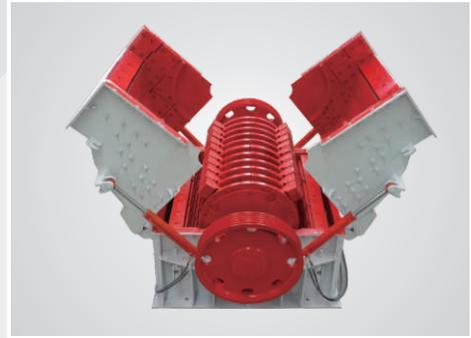

产品参数

>> Product Parameters

型号 Model	转子直径*长度 Rotor diameter*length (mm)	进料口尺寸宽*长 Feeding port size width*length (mm)	电机功率 Motor Power (kw)	产量 Capacity (t/h)
PCK0808	800*800	800*350	75	20-40
PCK1010	1000*1000	1000*400	55*2	40-50
PCK1013	1000*1300	1300*500	75*2	60-80
PCK1215	1200*1500	1500*500	110*2	80-100
PCK1318	1300*1800	1800*600	132*2	100-120
PCK1520	1500*1200	2000*700	160*2	120-150

注：技术数据如有变更，恕不另行通知。 Any change of technical data shall not be advised additionally.