

XGP系列单缸液压圆锥破碎机

XGP series single cylinder hydraulic cone crusher




新高耐集团经优化升级所研发的XGP系列单缸液压圆锥破碎机，集机械、液压、自动化、智能控制等技术于一体，适用于较硬物料的中细碎作业，具有自动化程度高、生产成本低等优点，在矿山破碎设备市场上占有着重要份额。

The XGP series single-cylinder hydraulic cone crusher developed by Xingonai Group through optimization and upgrading integrates machinery, hydraulic pressure, automation, intelligent control and other technologies. It is suitable for medium and fine crushing operations of relatively hard materials, with high automation and low production costs. And other advantages, occupy an important share in the mine crushing equipment market.

产品优势

Product Advantages

- 1、主轴上下两端均有支撑，可承受较大的破碎力和冲程；
- 2、破碎锥角大，腔型深，破碎比大，产量大；
- 3、过铁保护、清腔系统、排料口调整集底部单缸于一体，自动化程度更高；
- 4、多破碎腔型、应用灵活、适用范围广；
- 5、结构简单、故障率低，维护更方便快捷。

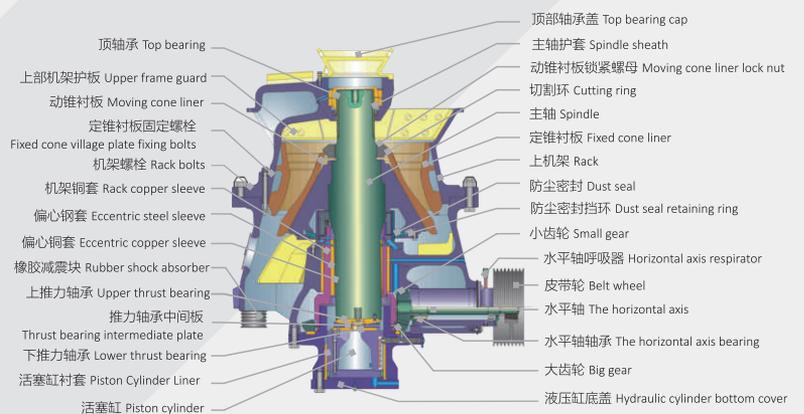

1. The upper and lower ends of the main shaft are supported, which can withstand greater crushing force and stroke;
2. The crushing cone angle is large, the cavity is deep, the crushing ratio is large, and the output is large;
3. Over-iron protection, cavity cleaning system, and adjustment of the

4. Multiple crushing cavity types, flexible application and wide application range;
5. The structure is simple, the failure rate is low, and the maintenance is more convenient and quick.

产品参数

>> Product Parameters

型号 Model	腔型 Cavity type	给料口 Feed port (mm)	最大给料粒度 Max feed size (mm)	最小排料 The smallest discharge port (mm)			最大排料 The maximum discharge port (mm)			电机功率 Motor Power (kw)	主机重量 Machine weight (kg)	处理能力 Capacity (t/h)	
				冲程 Stroke	冲程 Stroke	冲程 Stroke	冲程 Stroke	冲程 Stroke	冲程 Stroke				
XGP100	中碎 Medium crushing			16	22		16	22		75-90	8300	135-235	
		A	300	250	35	35		65	60				
		B	250	210	35	35		65	60				
	细碎 Fine crushing				16	22		16	22		90	6000	35-135
		A	150	120	12	15		39	37				
		B	130	105	10	11		33	31				
C		100	85	7	9		33	30					
XGP200	中碎 Medium crushing			18	25		18	25		110-160	11800	160-370	
		A	330	280	27	30		65	60				
		B	250	210	25	28		60	55				
	细碎 Fine crushing				18	25		18	25		160	10600	65-210
		A	220	180	18	22		35	30				
		B	150	120	15	19		35	30				
C		80	60	9	12		35	30					
XGP300	中碎 Medium crushing			25	32		25	32		160-250	20000	250-540	
		A	380	320	28	32		73	69				
		B	280	240	26	30		66	62				
	细碎 Fine crushing				25	32		25	32		250	15500	100-340
		A	230	190	20	25		45	40				
		B	150	125	17	20		45	40				
C		80	60	10	13		40	35					
XGP500	中碎 Medium crushing			18	25	32	18	25	32	250-315	33000	300-1000	
		A	500	420	50	55	60	80	75				70
		B	380	320	40	45	50	70	65				60
	细碎 Fine crushing				25	32	40	25	32	40	315	22500	100-500
		A	230	180	22	26	30	50	45	40			
		B	150	125	19	22	26	48	43	38			
C		100	80	12	14	16	40	35	30				
XGP600	中碎 Medium crushing			18	25	32	18	25	32	355	32700	300-1000	
		A	500	420	50	55	60	105	100				95
		B	380	320	45	45	55	105	100				95
	细碎 Fine crushing				34	42	50	34	42	50	355	27000	245-715
		A	280	220	22	26	30	45	35	30			
		B	150	125	19	22	26	45	35	30			
C		100	80	12	14	16	35	30	25				

注：技术数据如有变更，恕不另行通知。 Any change of technical data shall not be advised additionally.