

XGN-SZJ系列双转子制砂机

XGN-SZJ series double rotor sand making machine



XGN-SZJ系列双转子制砂机适用于石灰石、青石等物料的细碎作业，广泛应用于矿山开采、商混搅拌站、石料厂、水泥厂等行业。它既可以纯粹出精品砂，也可用于砂石同出（兼备整形功能），成品粒度可灵活调节（篦条间隙可以定制）。

XGN-SZJ series double-rotor sand making machine is suitable for fine crushing of limestone, bluestone and other materials, and is widely used in mining, commercial mixing plants, stone plants, cement plants and other industries. It can not only produce high-quality sand, but also can be used for simultaneous sand and gravel production (with shaping function), and the particle size of the finished product can be flexibly adjusted (the gap between grates can be customized).


性能特点

>> Performance Characteristics

- 1、双转子结构动能更足，单机产量大；“石打石”原理，降低锤头等部件磨损，寿命提升45%。
- 2、全液压开启，内部配件更换维修快捷方便；
- 3、设备四周配备观察门，便于随时观察设备内部情况；
- 4、转子外附高锰高铬保护套，寿命提高30%；

- 5、锤轴孔配有钨合金钢套，耐磨、耐冲击；
- 6、蓖条可根据需求定制，有圆孔蓖条和长条形蓖条可选；
- 7、蓖板和锤头之间的间隙可灵活调节，充分保证了设备的破碎效率；
- 8、成品粒型呈多棱体，颗粒圆润，级配连续，细度模数可调。

- 1.The kinetic energy of the double-rotor structure is more sufficient, and bigger capacity, the principle of "rock hitting rock" reduces the wear of hammer heads and other components, and the life span is increased by 45%.
- 2. Full hydraulic opening, quick and convenient replacement and maintenance of internal parts;
- 3. Equipped with observation doors around the equipment, it is convenient to observe the internal conditions of the equipment at any time;
- 4. The rotor is equipped with a high manganese and high chromium protective cover, which increases the lifespan by 30%;
- 5. The hammer shaft hole is equipped with a tungsten alloy steel sleeve, which is wear-resistant and impact-resistant;
- 6. The grating can be customized according to the needs, and there are round hole grating strips and long strip grating strips for option;
- 7.The gap between the grating plate and the hammer head can be adjusted flexibly, which fully guarantees the crushing efficiency of the equipment;
- 8.The product shape is polygon, the gradation is continuous, and the fineness modulus is adjustable.

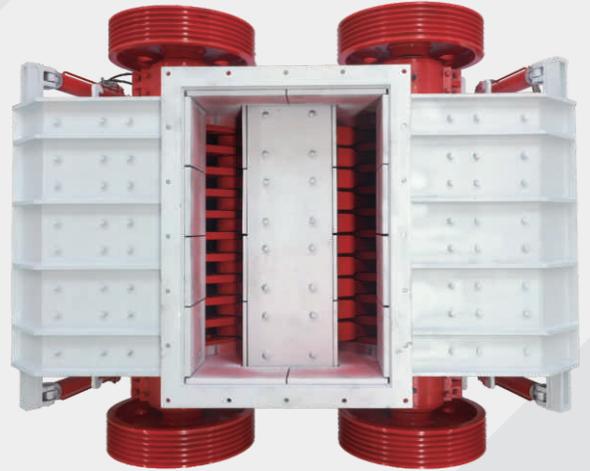

产品参数

>> Product Parameters

型号 Model	生产能力 Production capacity (t/h)	进料粒度 Feed size (mm)	进料口尺寸宽*长 Feeding port size width*length (mm)	外形尺寸 Overall size (mm)	电机功率 Motor Power (kw)
XGN-SZJ1315	150-220	≤80	1000*1570	3350*2920*2100	110*4
XGN-SZJ1516	220-300	≤100	1160*1740	4190*3220*2360	160*4
XGN-SZJ1618	350-400	≤150	1160*1740	4190*3220*2360	500*2

注：技术数据如有变更，恕不另行通知。 Any change of technical data shall not be advised additionally.