


细砂回收机

Fine sand recovery machine

传统人工砂生产线中，存在细砂流失率大、级配不合理等诸多弊端，为解决以上问题，新高耐集团细砂回收机应运而生，它可以有效降低细砂的流失量，使其控制在5%-10%之内，并提高机制砂品质，解决人工砂石生产线中成品砂细度模数偏高的难题。

In the traditional artificial sand production line, there are many disadvantages such as high loss rate of fine sand and unreasonable gradation, in order to solve the above problems, Xingao nai Group fine sand recycling machine came into being, it can effectively reduce the loss of fine sand, keep it within 5%-10%, improve the quality of machine-made sand, and solve the problem of high fineness modulus of finished sand in the artificial sand production line.

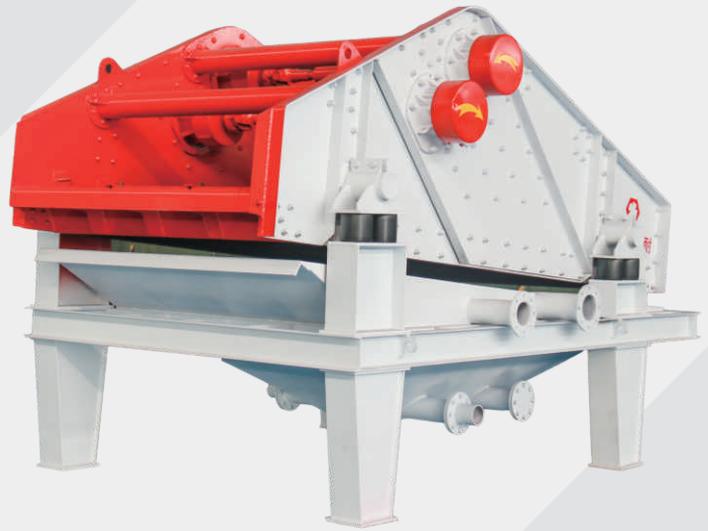

产品优势

>> Product Advantages

不易堵料

振动筛采用耐磨聚氨酯筛网，相对其它类型的筛网寿命长，且不易堵料。

净化回收率高

可回收排放总量中85%的0.2mm以上细颗粒物料，整机处理污浆能力大，具有其它设备没有的技术优势。

清理成本低

有效回收细粒，降低废料率，成品细料可以直接运走供应市场，减少了沉淀池的工作量，降低了沉淀池的清理成本。

使用寿命长

旋流器内衬聚氨酯，优质耐磨易损件，有效提高整个装置的使用寿命，可顺利完成尾矿浓缩、液体净化等工作。

Not easy to blocking material

The vibrating screen adopts wear-resistant polyurethane screen, which has a longer service life than other types of screens and it is not easy to block the material.

High purification recovery rate

It can recycle 85% of the fine particles above 0.2mm in the total discharge, and the whole machine has a large capacity to treat sludge, and has technical advantages that other equipment does not have.

Low cleaning costs

Effectively recycle fine particles, reduce the waste rate, and the finished fine materials can be directly transported to the supply market, reducing the workload of the sedimentation tank and reducing the cleaning cost of the sedimentation tank.

Long service life

The cyclone is lined with polyurethane, high-quality wear-resistant and wearing parts, which can effectively improve the service life of the whole device, and can successfully complete tailings concentration and liquid purification.

产品参数

>> Product Parameters

型号 Model	宽*长 Width*Length (mm)	筛机功率 Screening machine power (kw)	旋流器规格 Cyclone Specifications	出砂量 Capacity (t/h)	处理水量 water consumption (m ³ /h)	渣浆泵功率 Slurry pump power (kw)	总功率 Total power (kw)	重量 Weight (kg)	外形尺寸 长*宽*高 Overall size length x width x height (mm)
XGN1224-35	1200×2400	2.2*2	350	50-80	80-120	18.5	23	2376	3000×1800×2773
XGN1530-65	1500×3000	3*2	300*2	80-100	120-180	15*2	36	3745	3500×2100×3200
XGN1840-75	1800×4000	5.5*2	350*2	100-140	160-240	18.5*2	48	5350	4500×2400×3300
XGN2050-100	2000×5000	11*2	250*4	120-160	200-280	18.5*2	59	6736	5500×2600×3520
XGN2250-100	2250×5000	11*2	250*4	150-220	200-280	22*2	66	7850	5500×2800×3600

注：技术数据如有变更，恕不另行通知。 Any change of technical data shall not be advised additionally.